User Manual

Table of Contents

1.Function introduction

2.Getting Start

3.Add/Edit/Delete device

4.Alarm video push

5.Live View

6.Snapshot and Record

7.Local Settings

8. remote playback

9. Help and support.


1. Function introduction


This app allows iphone user to view and control live video streams from IP Cameras, NVR and DVRs.

1. Stream Videos over WIFI or 3G
2. View up to 4 live video streams
3. Device management.
4. Snapshot and browse picture
5. Record and playback video
6. PTZ control
7. Alarm video push
8. Support horizontal and vertical screen viewing
9. Audio and Talkback.
10. Query and remote playback
11. P2P and QR code scan

2. Getting Start

Connect your iphone to the 3G or WIFI network. Run this app, and you will see main interface.(as the below pictures)

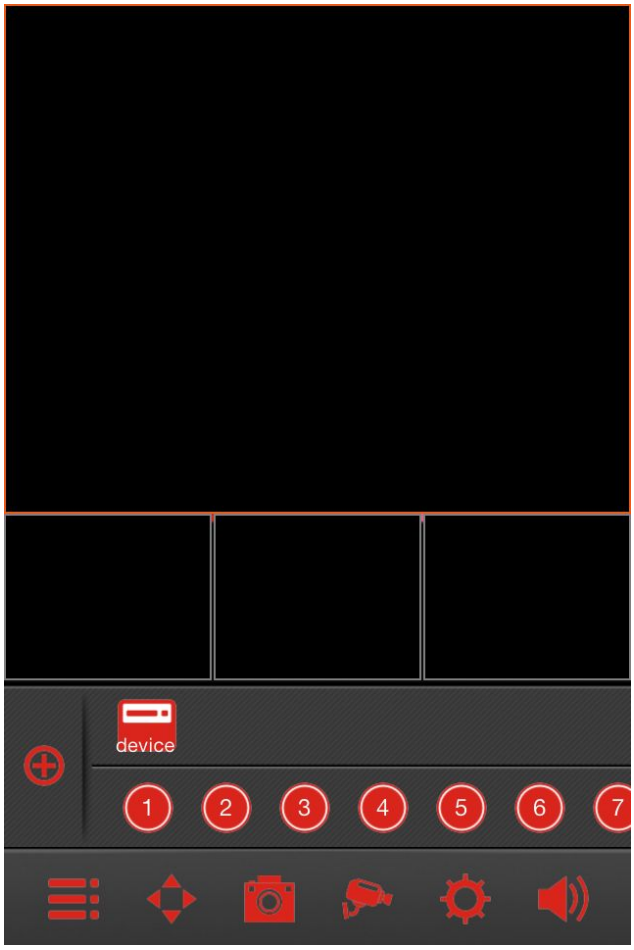
device
1
2
3
4
5
6
7

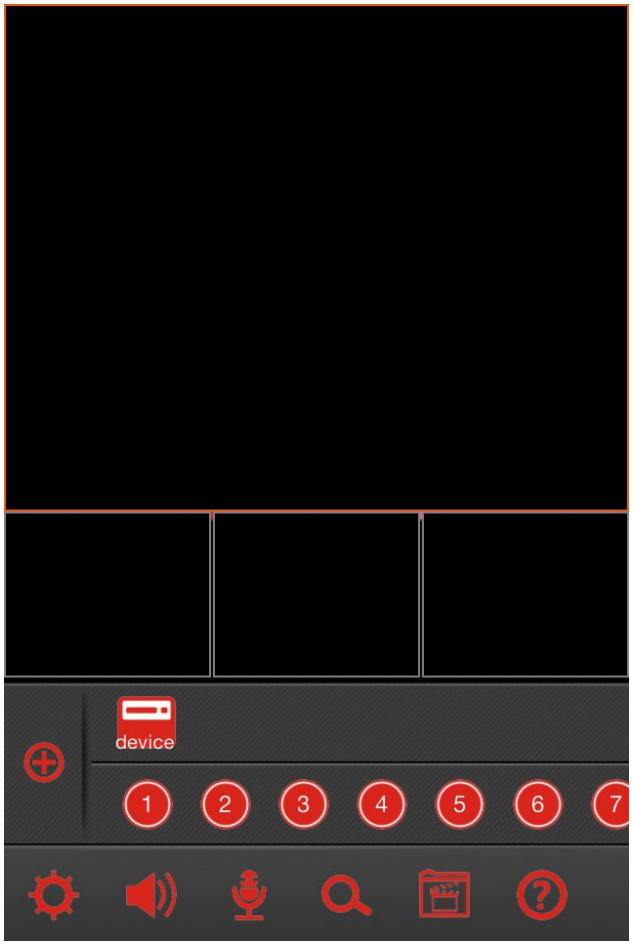

Panel button description


Button icon		Function description
		Add a new device
		Device List
		Snapshot and Record files
		PTZ:UP
		PTZ: Down
		PTZ: Right
		PTZ: Left
		Zoom In
		Zoom Out
		Focus Add

	Focus Minus
	Iris Add
	Iris Minus
	Snapshot
	Start/Stop Record
	Local Settings
	User guide
	Audio
	Talkback
	Query Remote Video

3. Add/Edit/Delete device


• Add Device

Tap , then you will have the two way below to add: two-dimensional code scanning and manually enter.(as the below picture)

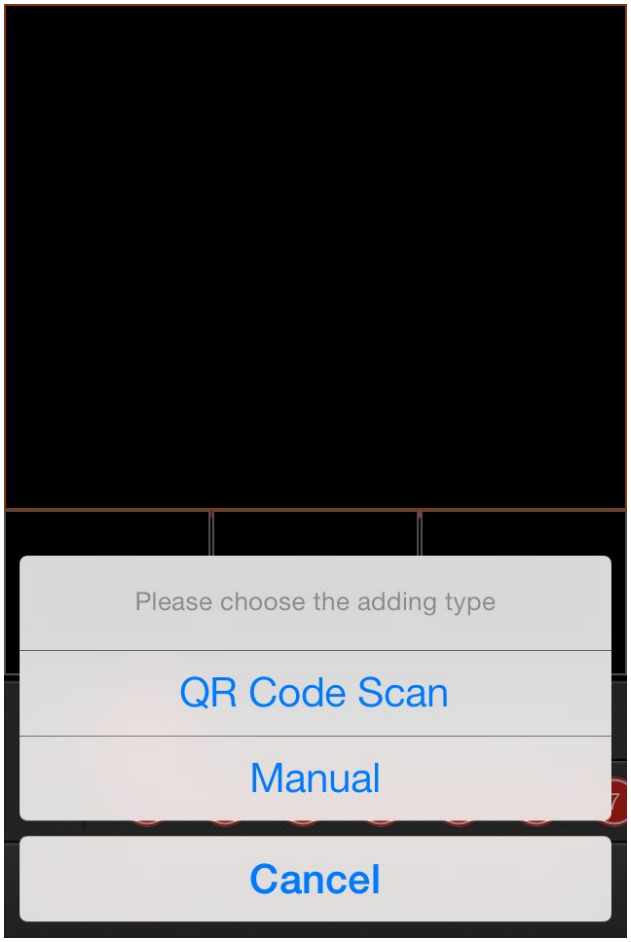


(1) when you click “QR code scan”, it will go to code scan. Please point the camera of mobile phone directly to the code until it scan the code. When the code scanning is successful, you will

get the below picture.

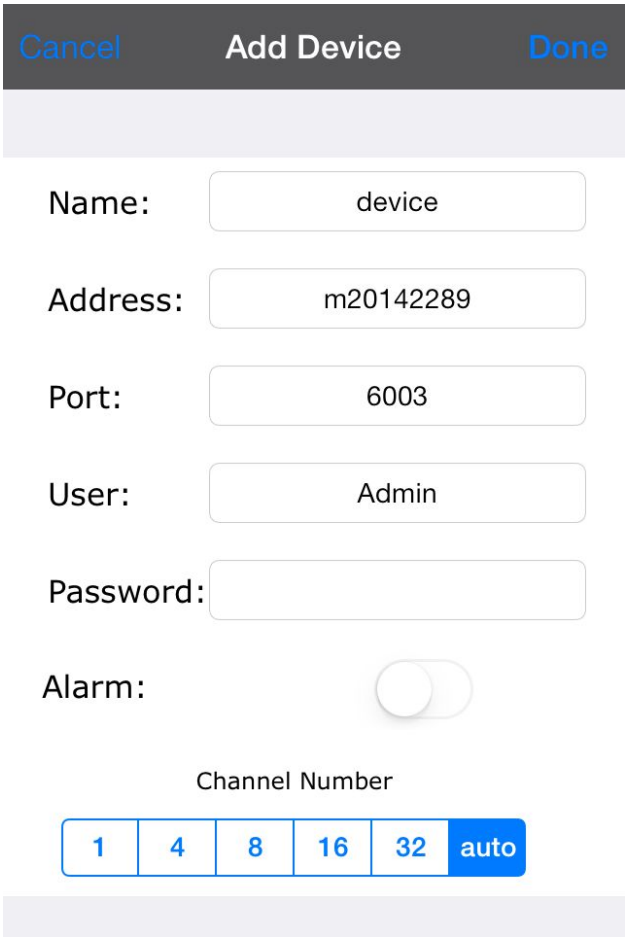

Entry	Descriptions
Name	Any characters that you like to identify this device. Please be noted that the name should not duplicate with existing device's name.
Address	The P2P ID, Obtained by code scanning
Port	DVR's mobile port, 6003 by default
User	DVR's user name, Admin by default
Password	DVR's password, no password by default
Alarm(video push)	Turn on or off the video push function
Channel Number	Select the channel number, when assign auto, the app will set the number automatically.

(2) When you click "manual", you will see below picture.

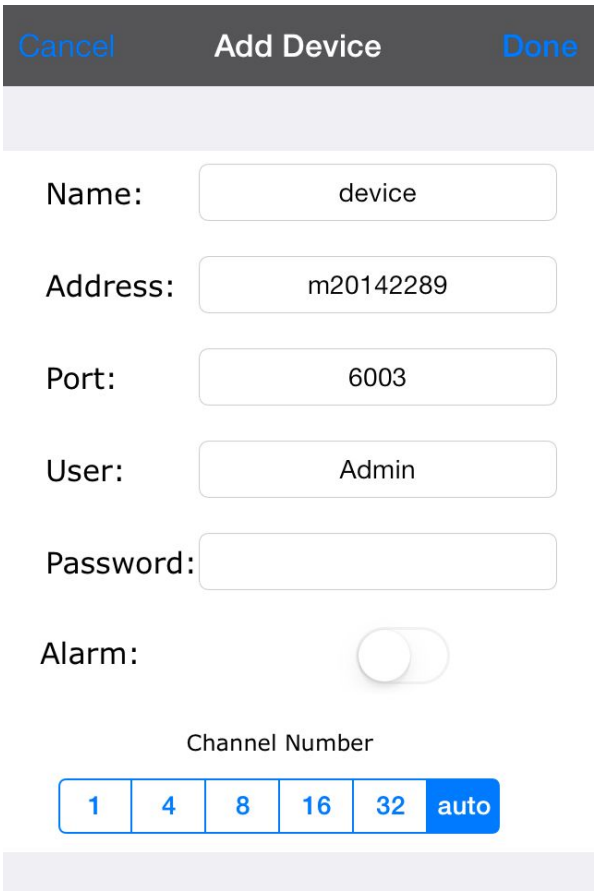


And you just need input the information of device. Please refer to the below descriptions.

Entry	Descriptions
Name	Any characters that you like to identify this device. Please be noted that the name should not duplicate with existing device's name.
Address	Target's IP address or URL, please be noted that if URL is used, the "http://"prefix should not be included.
Port	DVR's mobile port, 6003 by default
User	DVR's user name, Admin by default
Password	DVR's password, no password by default
Alarm(video push)	Turn on or off the video push function
Channel Number	Select the channel number, when assign auto, the app will set the number automatically.


• Edit/Delete Device

To Edit/Delete a device, Tap  open the Device list(as the below picture).

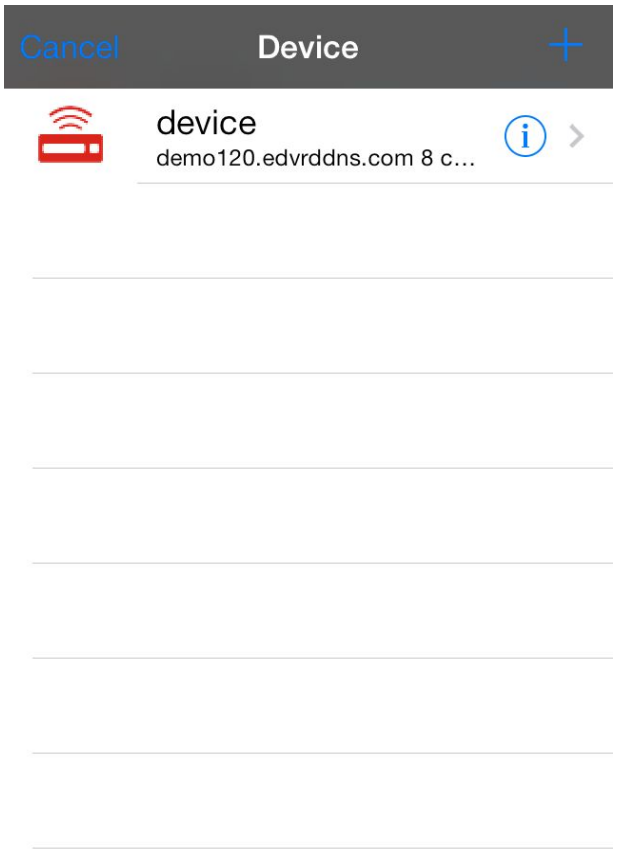

You can enter into editing mode by tapping the  of a certain row and click 

button in the upper-right corner. Then you will go to the below window. You can modify device login information in this window. And at the bottom of this window, you can delete the device by click the red button

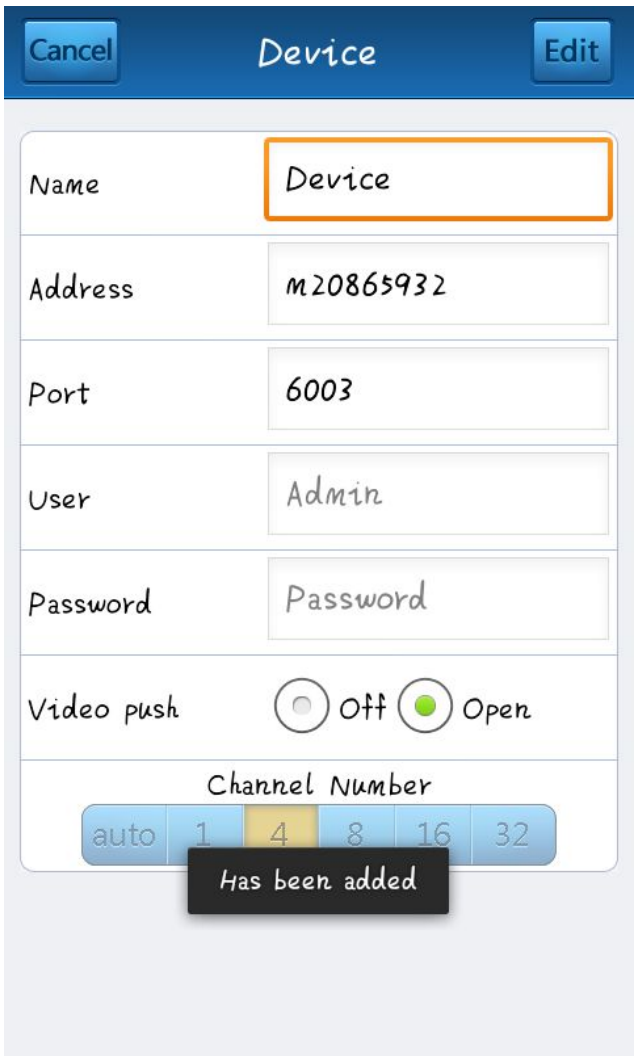


After revise, please tap  in the upper right corner.


4, Alarm video push

Alarm video push is the active audio notification feature. When the device have alarm, it will send the alert message to the mobile phone.


Turn on the alarm video push: go to the device edit interface, and turn on the alarm video push, and wait for a few seconds, then it pop-up a message” success to start pushalarm”, then click ok.

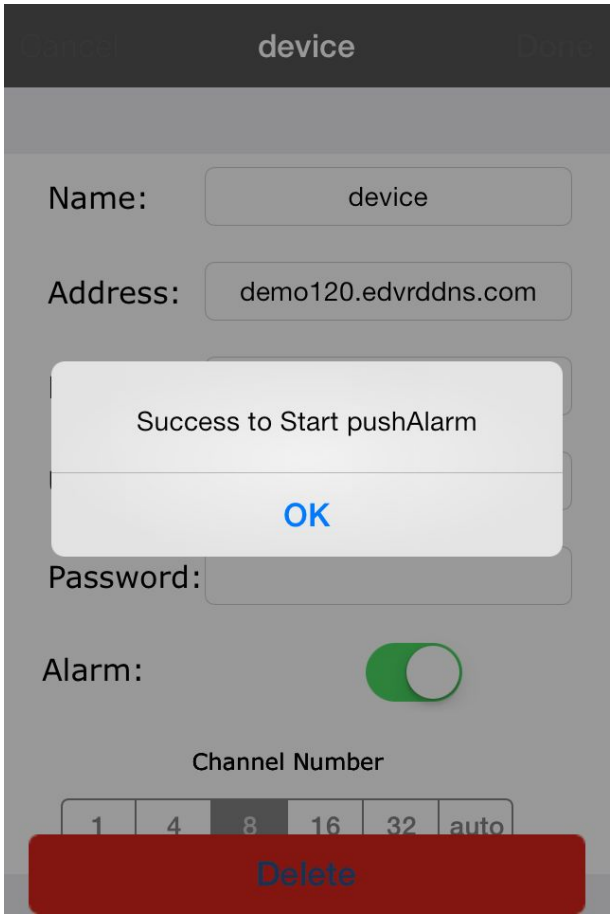

When there is alarm in the device, it will send a message to the mobile phone as the below picture:

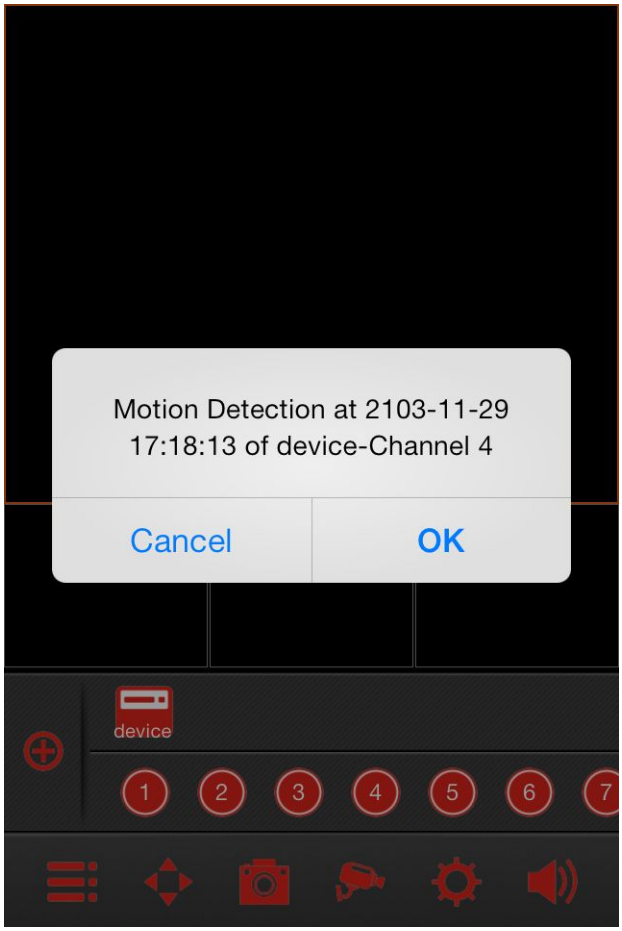


Turn off the alarm video push: go to the device edit interface, and turn off the alarm video push, and wait for a few seconds, then it pop-up a message” logout success”, then click ok.

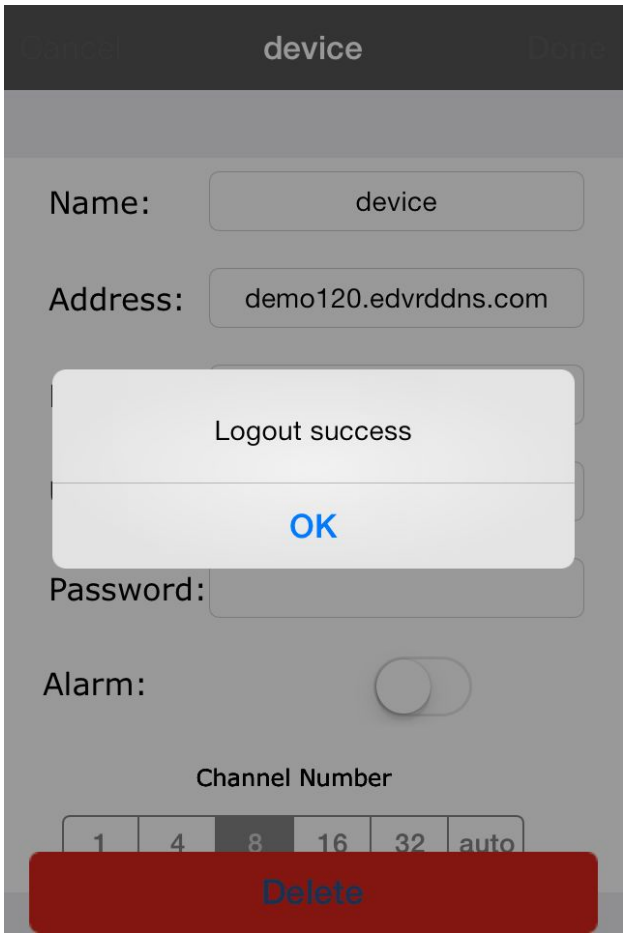

5. Live View


When finish adding device, it will show the below playing window.

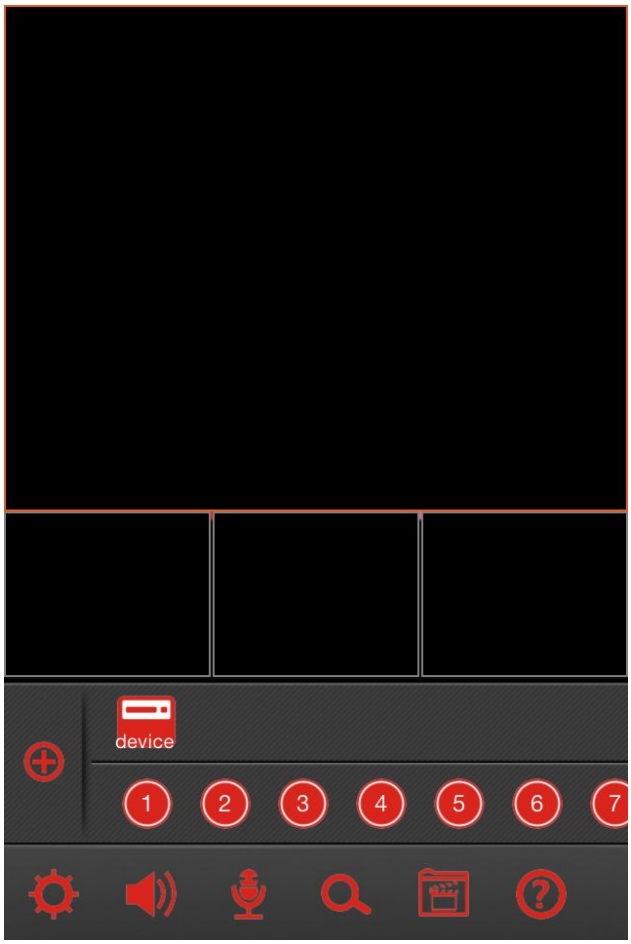

To start a live video, tap the Device icon, then tap the channel you want.


Repeat above steps to connect to other channels of the device or another devices.

When some channel is selected, the channel circle icon's color will turn into bright-yellow. Tap the bright-yellow icon, the channel video will stop and the channel circle icon color becomes gray.(as the below picture)

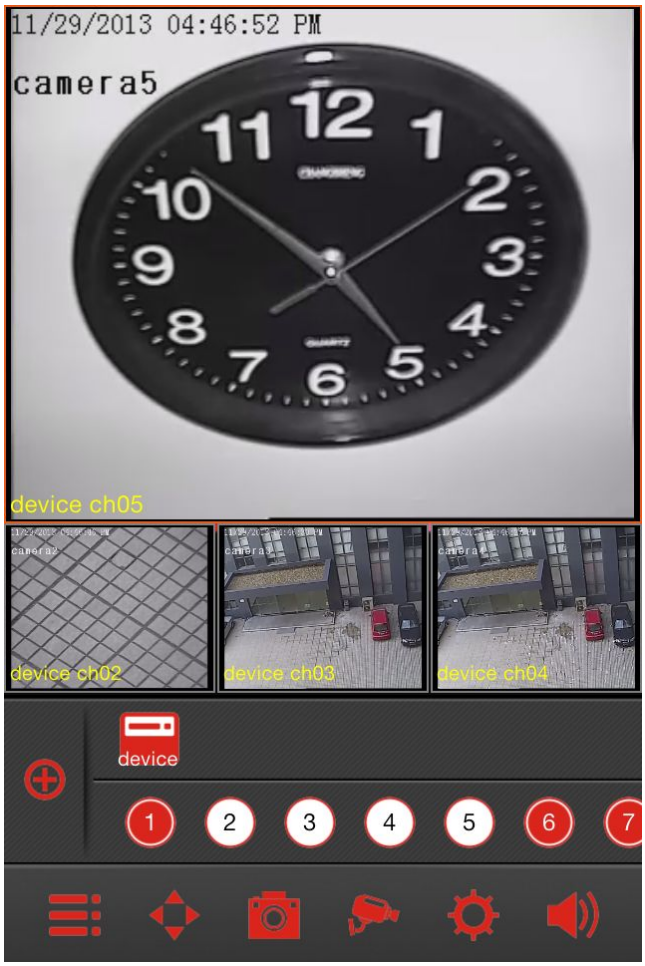

• PTZ Control

Tap  to open the PTZ Control panel. Then you can control the PTZ by the panel.

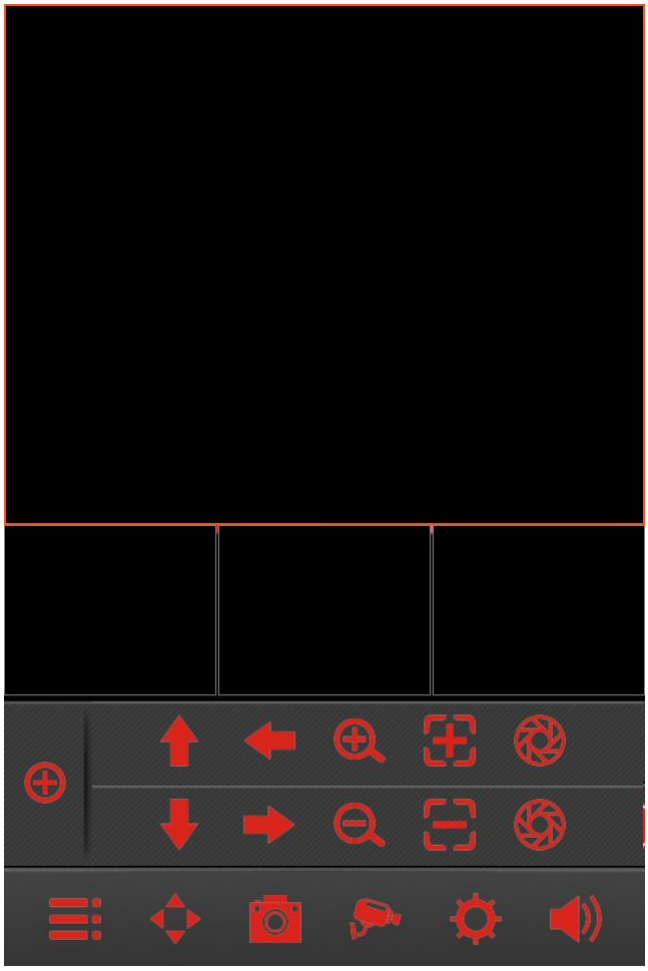

To hide the panel, you can either tap the button  again or tap any places of the screen.


6 Snapshot and Record files


• Snapshot and Record Playback

You can snapshot the live video by  and start/stop recording the live video by .


These snapshot and recording files are saved in the android mobile device.

Tap  to visit the Snapshots & Record files, you can playback or delete the files from the below window.

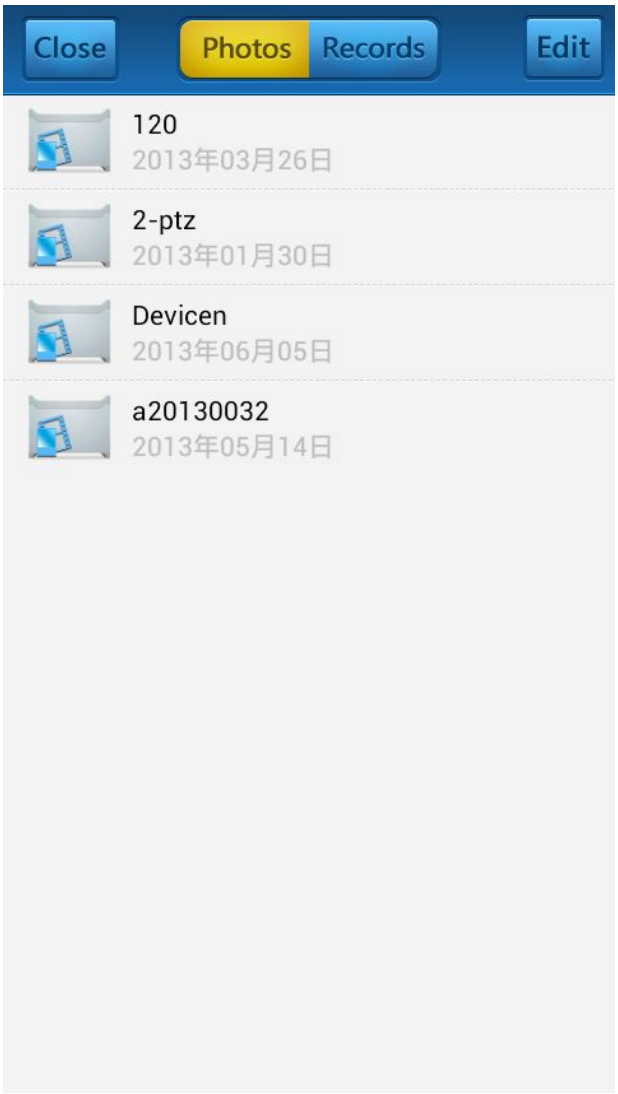

Tap 

, you will see the device list that have snapshot. Then tap any device, and you will see all the snapshot files of that device. You can delete the snapshot file by tapping “edit” in the upper right corner.

Tap 


, you will see the device list that have recording. Then tap any device, and you will see all the recording files of that device. You can delete the recording file by tapping “edit” in the upper right corner.

• Export Snapshot and Record Files

You can search “super meye” folder in the storage card of iphone, because the software will create such folder automatically and save the snapshot and recording files in this folder. Then you can copy and export the snapshot and recording files that you want.

7•Local Settings

Tap  to open the Settings view:

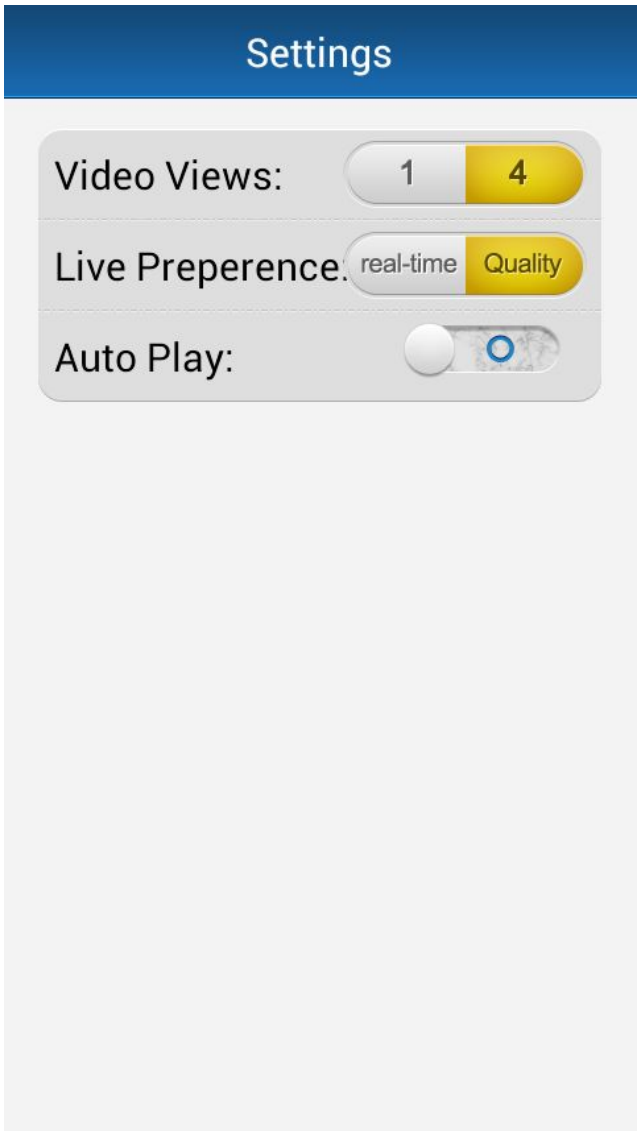


Video Views		One window display on the Live view
		Four windows display on the Live view
Live		Real-time mode: no buffering, which means there is minimum

Preference		delay of the video display and video fluency may be suffered;
		Quality mode: buffering enabled, the video will be more fluent in this mode;
Auto Play		Your last sessions will be recorded and opened automatically in your next launch;
		Default mode, the auto-session-recording is disabled;

8• remote playback

Tap , and you will see the device list. Tap  of any device, and you will go to the below window.

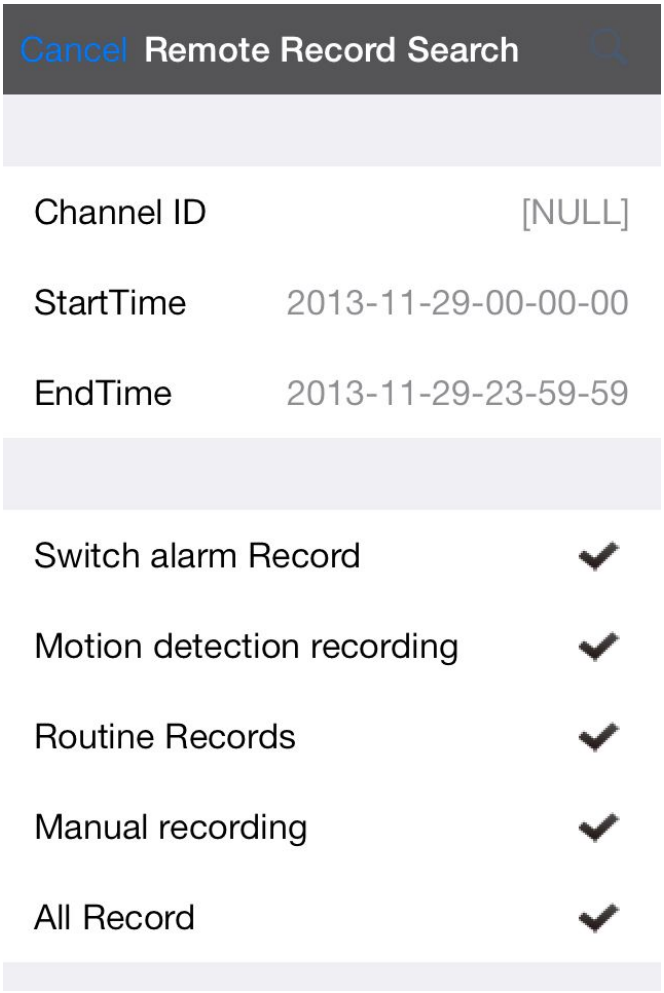


In this window, you could set the search criteria as time/channel number/records types to get the accurate result. After the criteria set, press  on the upper right corner to begin search. Then the recording files that meet the criteria requirement will show as the below picture.




9• Help and support

If you have problems of using this app, please click the panel button , then you will get below pictures:

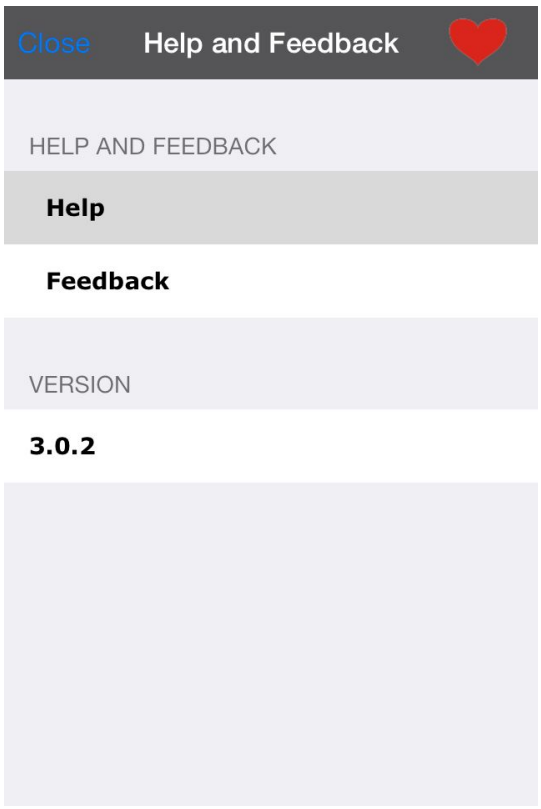
Close
Help and Feedback
HELP AND FEEDBACK
Help
Feedback
VERSION
3.0.2


Back
User guide
Snapshot and Record files

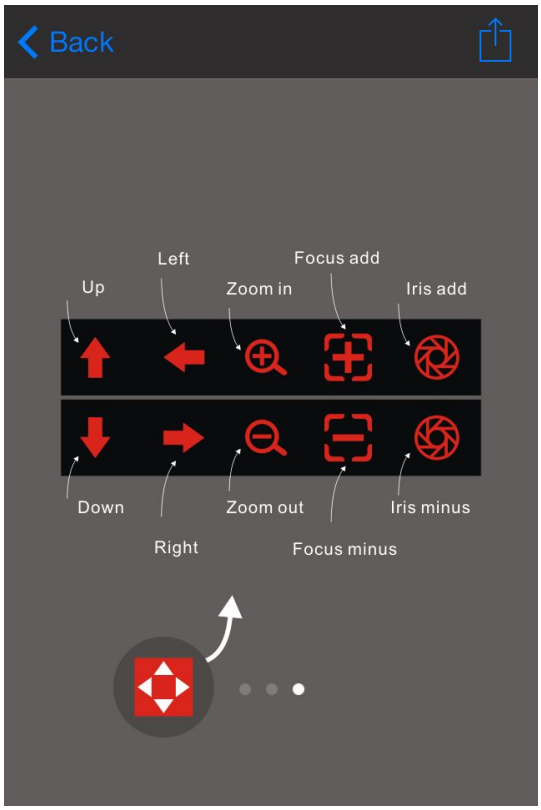
Back
Left
Focus add
Up
Zoom in
Iris add
Down
Zoom out
Iris minus
Right
Focus minus


Back
Add a new device
Drag to enlarge
Selected Device
Channel
Snapshot
More
PTZ control
Local settings